

PORTABLE SCENE LIGHT OR PORTABLE SCENE LIGHT EXT RECHARGEABLE SCENE LIGHT

Portable Scene Light packs to a compact size (22 in.: 55.88 cm) for easy storage



Portable Scene Light EXT packs to a compact size (25.5 in.: 64.8 cm) for easy storage



Material/Lens High-impact thermoplastic housing. Weatherproof construction; O-ring sealed, unbreakable polycarbonate with scratch-resistant coating .

Dims/Weight Body Width: 6.5 in. (16.5 cm) Overall Height: 11 in. (27.9 cm) Head Diameter: 6.7 in. (17 cm) (27.9 cm) Head Diameter: 6.7 in. (17 cm)

(Retracted Position) Portable Scene Light - Length: 22.5 in. (57.2 cm)
Portable Scene Light - Weight: 25 lbs (11.3 kg)
Portable Scene Light EXT - Length: 25.5 in. (64.8 cm)
Portable Scene Light EXT - Weight: 25.5 lbs (11.6 kg)

Output/ Runtime 6 LEDs and wide pattern reflectors produce a uniform flood pattern with two selectable beam widths and three light output intensities

- High for a super-bright flood beam: 5,300 lumens; 410m beam; runs 4 hours
- Medium for an intense beam and longer run time: 2,500 lumens; 292m beam; runs 9 hours
- Low for when a less intense beam is ideal and for longer run time: 1,300 lumens; 215m beam; runs 18 hours

Switch Toggle switch allows operation from internal battery or continuous operation from external 12V DC power source

Battery Zero-maintenance 12V, 14.4 Ah sealed lead acid battery rechargeable up to 500 times. Red and green LEDs provide charge status feedback. 10 hour charge to 90% battery capacity with continuous trickle charge to maximize battery capacity. Batteries will continue to charge while operating directly from an external 12V DC power source when using the remote cord or AC charger.

Features

- Selectable diffuser settings for two beam widths. Works with all three modes
- Optimum peripheral illumination for scene lighting; 90° swivel to aim the beam where you need it for task lighting
- Balanced design and easy setup:
- Less than 30 seconds for full deployment
- Stabilization legs provide balance on uneven surfaces
- Packs to a compact size for easy stowage
- IP67 rated; dust-tight and waterproof to 1 meter for 30 minutes
- Designed to resist 40mph wind continuous in all directions with head fully extended

Approvals IP67 tested, CEC compliant.


Warranty Streamlight warrants this product to be free of defects for a lifetime of use except for batteries and bulbs, abuse and normal wear. We will repair, replace or refund the purchase price of this product should we determine it to be defective. This limited lifetime warranty also excludes rechargeable batteries, chargers, switches and electronics which have a 2 year warranty with proof of purchase. THIS IS THE ONLY WARRANTY, EXPRESSED OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. INCIDENTAL, CONSEQUENTIAL OR SPECIAL DAMAGES ARE EXPRESSLY DISCLAIMED EXCEPT WHERE SUCH LIMITATION IS PROHIBITED BY LAW. You may have other specific legal rights which vary by jurisdiction. Visit streamlight.com for full warranty information.



90° swivel neck allows you to aim the beam where you need it

Built-in cord prevents snags

Pole extends to 84" (213.36 cm) - EXT model
72" (182.88 cm) original model

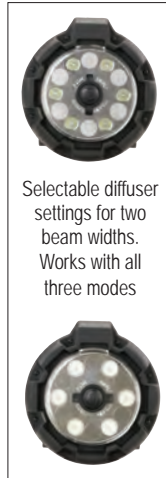

Selectable diffuser settings for two beam widths. Works with all three modes

Stabilization legs provide balance on uneven surfaces; fully deploy and lock in less than 30 seconds

Assembled in USA

Item	UPC	Part #
Portable Scene Light - 120V AC/12V DC - Yellow	080926-45670-9	45670
Portable Scene Light - 230V AC/12V DC - Yellow	080926-45671-6	45671
Portable Scene Light - 240V AC/12V DC - Yellow	080926-45672-3	45672
Portable Scene Light - 240V (AUS/NZ) AC/12V DC - Yellow	080926-45674-7	45674
Portable Scene Light with 100V AC/12V DC - Yellow	080926-45673-0	45673
Portable Scene Light Ext 120V - Yellow	080926-45680-8	45680
Portable Scene Light Ext 230V - Yellow	080926-45681-5	45681
Portable Scene Light Ext 240V - Yellow	080926-45682-2	45682
Portable Scene Light Ext 100V - Yellow	080926-45683-9	45683
Portable Scene Light Ext 240V (AUS/NZ) - Yellow	080926-45684-6	45684

	Item	UPC	Part #
	12V DC power cord 10ft (3 meters)*	080926-22056-0	22056
	Portable Scene Light Power Supply	080926-22083-6	22083
	Portable Scene Light Cord with 120V AC Plug - Works with Portable Scene Light power supply (22083)	080926-22074-7	22074
	Portable Scene Light Cord with 230V AC Plug - Works with Portable Scene Light power supply (22083)	080926-22075-1	22075
	Portable Scene Light Cord with 240V UK AC Plug - Works with Portable Scene Light power supply (22083)	080926-22076-8	22076
	Portable Scene Light Cord with 100V AC Plug - Works with Portable Scene Light power supply (22083)*	080926-22077-5	22077
	Portable Scene Light Cord with 240V UAS/NZ AC Plug - Works with Portable Scene Light power supply (22083)	080926-22078-2	22078
	Quick Release Strap	080926-44050-0	44050
	Shoulder Strap with Carabiner Lock	080926-45677-8	45677
	Battery - HID LiteBox/E-Flood LiteBox HL/Portable Scene Light	080926-45630-3	45630

*Not Shown